

APPLICATION FOR CERTIFICATE OF APPROPRIATENESS (COA)

Building address 712 E 4th ST Bethlehem PA 18015
 Owner of building 712-714 E 4th ST LLC Phone 610-240-9623
 Owner's email & mailing address 240 S. Allen St #2300
 Applicant Sami Rabin Phone: 610-240-9623
 Applicant's email & mailing address 737 N Graham ST Allentown PA 18109
 Street and Number City State Zip Code

APPLICANT MUST ATTEND MEETING FOR CASE TO BE HEARD.

USE THE CHECKLIST ON THE BACK OF THIS APPLICATION TO ENSURE YOUR SUBMISSION IS COMPLETE.

*Application form, photographs, and drawings must be submitted **2 weeks prior** to the regular scheduled meeting in order to be placed on the agenda for the next meeting.*

1. PHOTOGRAPHS - Photographs of your building and neighboring buildings **must accompany** your application.

2. TYPE OF WORK PROPOSED – Check all that apply. Please bring any samples or manufactures specifications for products you will use in this project.

- | | |
|--|--|
| ☐ Trim and decorative woodwork | ☐ Skylights |
| ☐ Siding and Masonry | ☐ Metal work |
| ☐ Roofing, gutter and downspout | ☐ Light fixtures |
| ☐ Windows, doors, and associated hardware | ☐ Signs |
| ☐ Storm windows and storm doors | ☐ Demolition |
| ☐ Shutters and associated hardware | ☒ Other <u>Vinyl Letters</u> |
| ☐ Paint (Submit color chips – HARB only) | |

3. DRAWINGS OF PROPOSED WORK – Required drawings **must accompany** your application. Please submit **ONE ORIGINAL AND TEN (10) COPIES OF DRAWINGS, PHOTOGRAPHS, APPLICATION FORM, AND ANY SPECIFICATIONS**

- ☐ Alteration, renovation, restoration (1/4 or 1/8"=1'0" scale drawings required IF walls or openings altered.)
- ☐ New addition (1/4" or 1/8"=1'0" scale drawings: elevations, floor plans, site plan)
- ☐ New building or structure (1/4" or 1/8"=1'0" scale drawings: elevations, floor plans, site plan)
- ☐ Demolition, removal of building features or building (1/4" or 1/8"=1'0" scale drawings: elevation of remaining site and site plan)
- ☐ A scale drawing, with an elevation view, is required for all sign submittals

4. DESCRIBE PROJECT – Describe any work checked in #2 and #3 above. Attach additional sheets as needed.

Vinyl letters cut on FRONT WINDOW.

5. APPLICANT'S SIGNATURE Sami Rabin **DATE:** 6/4/21


OWNER'S SIGNATURE [Signature] **DATE:** 6/4/21

[PROJECT]
PRINTED
603 5th Street
Whitehall Pa. 18052

TO: DOLLAR & UP
712 E 4TH STREET
BETHLEHEM PA 18015

GENERAL NOTES

WINDOW VINYL LETTTRS

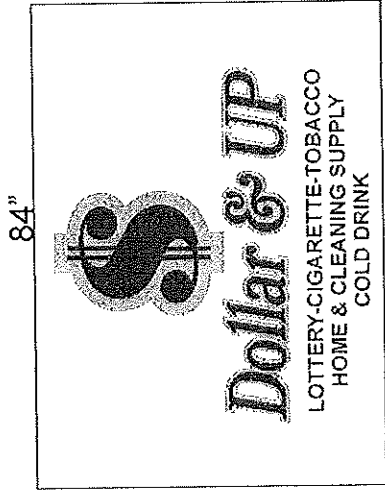

60"

Designed per -2012

Snow Loads :

Ground Snow load..... Pg-50 pst
Snow Exposure Factor..Ce = 1.0
Snow Load Importance..Is = 1.1
Thermal Factor.....Ct = 1.0

Wind Load :

Basic Wind Speed.....90 mph
Wind Importance Factor..I=1.15
Wind Exposure.....c
ASCE Forcepef1.8
Gust Factor.....0.85

Exterior Components designed
in accordance With applicable
provisions of the ASCE 7-10

ENGINEERING – INSTALLATION NOTE

1. Minimum Concrete strength shall be 3,000 psi
2. All Plate, angle, channel, tee and wide flange shall be ASTM A.36 grade unless otherwise specified
3. Square and rectangular tube shall be ASTM A500 grade 13
4. Round pipe shall be ASTM A53 Grade H or equivalent
5. Design and Fabrication according to AISC Steel Construction Manual 13th edition
6. Concrete design & construction to be in accordance with ACI 318-05
7. Concrete poured into constrained earth excavations must cure under proper conditions for 4 days prior to the sign box installation. [Exception: if the overall height of the sign is less than 20 ft from grade and the sign pole adequately braced against wind load for minimum of 4 days, the box may be installed the same day as the footing is poured.]
8. For pier and caisson footing concrete be against undisturbed earth. Minimum a minimum 3" cover over all embedded steel
9. Provide a minimum of 4" cover between bottom of support pole and bottom of concrete footing on all direct burial footing.
10. If clay, silt or organic soil properties are present upon excavation, it is the responsibility of contractor to contact us for design modification.
11. Sign box structure shall be constructed of min. 1-1/2"x1-1/2" aluminum manglewelded framing with a max. span of 30" O.C. in any direction. Aluminum shall be 6061-T6, welded in accordance with AWS D1.2.
12. Sign Boxes shall be fastened to support steel with minimum of [2] 3/8" diam . A 307 thru-bolt rows, every 36" O.C. Max along support steel length.

84"



Dollar & UP

LOTTERY-CIGARETTE-TOBACCO
HOME & CLEANING SUPPLY
COLD DRINK

60"



