

APPLICATION FOR CERTIFICATE OF APPROPRIATENESS (COA)

Building address 518 LONG STREET, BETHLEHEM, PA
Owner of building ROBERT VIRGILIO Phone [REDACTED]
Owner's email & mailing address [REDACTED] 522 LONG St.
Applicant GARY LADER Phone: [REDACTED]
Applicant's email & mailing address [REDACTED]

Street and Number City State Zip Code
414 W. BROAD St. BETHLEHEM PA 18018

APPLICANT MUST ATTEND MEETING FOR CASE TO BE HEARD.

USE THE CHECKLIST ON THE BACK OF THIS APPLICATION TO ENSURE YOUR SUBMISSION IS COMPLETE.

Application form, photographs, and drawings must be submitted (see attached for deadline) prior to the regular scheduled meeting in order to be placed on the agenda for the next meeting.

1. **PHOTOGRAPHS** - Photographs of your building and neighboring buildings must accompany your application.

2. **TYPE OF WORK PROPOSED** - Check all that apply. Please bring any samples or manufactures specifications for products you will use in this project.

<input type="checkbox"/> Trim and decorative woodwork	<input type="checkbox"/> Skylights
<input type="checkbox"/> Siding and Masonry	<input type="checkbox"/> Metal work
<input type="checkbox"/> Roofing, gutter and downspout	<input type="checkbox"/> Light fixtures
<input checked="" type="checkbox"/> Windows, doors, and associated hardware	<input type="checkbox"/> Signs
<input type="checkbox"/> Storm windows and storm doors	<input type="checkbox"/> Demolition
<input type="checkbox"/> Shutters and associated hardware	<input type="checkbox"/> Other _____
<input checked="" type="checkbox"/> Paint (Submit color chips - HARB only)	

3. **DRAWINGS OF PROPOSED WORK** - Required drawings must accompany your application. Please submit ONE ORIGINAL AND TEN (10) COPIES OF DRAWINGS, PHOTOGRAPHS, APPLICATION FORM, AND ANY SPECIFICATIONS

☒ Alteration, renovation, restoration (1/4 or 1/8"=1'0" scale drawings required IF walls or openings altered.)
☐ New addition (1/4" or 1/8"=1'0" scale drawings: elevations, floor plans, site plan)
☐ New building or structure (1/4" or 1/8"=1'0" scale drawings: elevations, floor plans, site plan)
☐ Demolition, removal of building features or building (1/4" or 1/8"=1'0" scale drawings: elevation of remaining site and site plan)
☒ A scale drawing, with an elevation view, is required for all sign submittals


4. **DESCRIBE PROJECT** - Describe any work checked in #2 and #3 above. Attach additional sheets as needed.

A PAIR OF WOOD DOORS IS TO BE INSTALLED AT AN EXISTING COURTYARD FOR PRIVACY

5. **APPLICANT'S SIGNATURE** Gary Lader **DATE:** 8/11/22
OWNER'S SIGNATURE Robert Virgilio **DATE:** 8/11/22

Cranked Bands with Pins

Mounting Instructions (12", 18", 24", and 36")

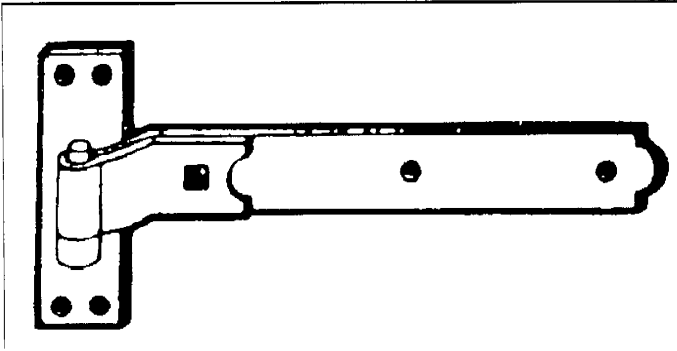

Fasten the two straps to the door or gate at the desired location. Make sure that they are perpendicular to the hinge side of the door or gate. Ensure that the straps are mounted the correct distance to align with the pins on the rectangular plate. *(Tip: measure the distance from the center of the eye on the band (equals center of pin on plate) to the center of the square hole in the band. From this measurement deduct half the width of the rectangular plate plus the space between the gate and post to determine where to drill the hole for the carriage bolt.)*

Mount the rectangular plate no less than 1/4" from the edge of the door jam or gate post (for flush mounting).

2 inch #12 screws are used to fasten the plate to the jam and on the round beveled holes in the bands. A 1/2" carriage bolt should be inserted in the square hole in the strap (3/8" for the 12" strap), through a 1/2" or 3/8" hole drilled through the door or gate.

Please note that while black stainless steel screws are optional available with our black powder coated hinges we do not supply the carriage bolts as the length requirement varies greatly with the application.

We suggest using hot dipped galvanized or stainless carriage bolts. The heads can be painted after installation.


This type of hinge has a sloppy fit on the pin. While this might appear abnormal with just one hinge, once the second hinge is installed the "play" will be minimal.

Tips:

1. Initially when mounting the pin plates use only two screws on each plate. After assuring that all is aligned correctly then complete the plate installation as outlined above.
2. To prevent the gate from being lifted off the pins install the top plate with the pin facing downward after the gate is installed and aligned on the bottom pin.

HingeandLatch.com, Canada and USA

CURVED TREE BRANCH HANDLE #2 - BARN DOOR HANDLE WITH DIAMOND SHAPE MOUNTING BASES

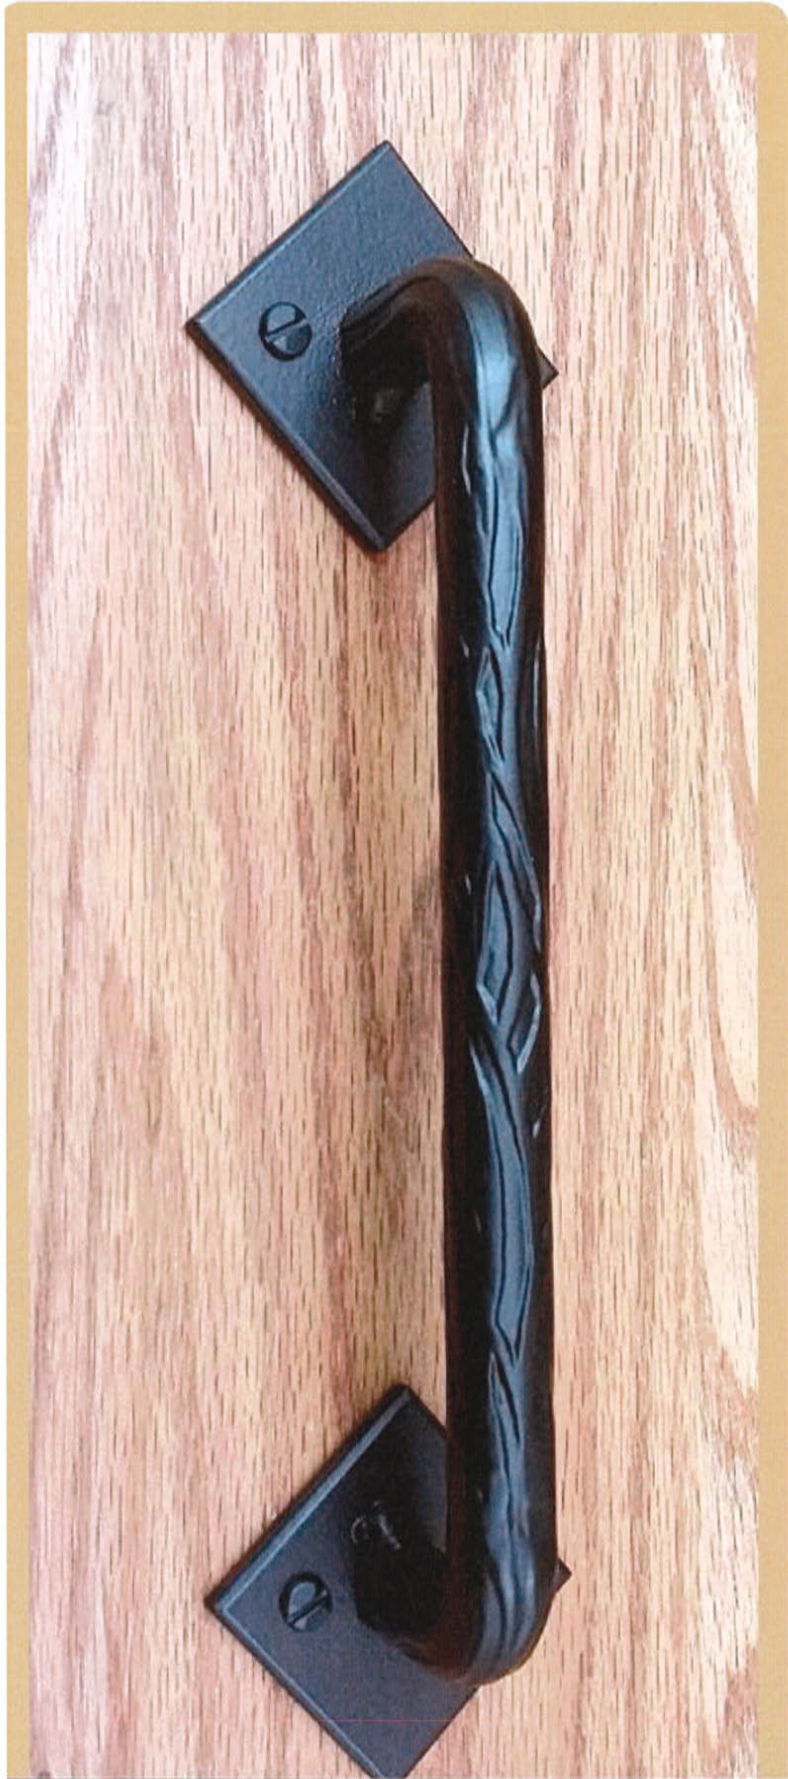

\$ 43.95 ~~\$ 47.95~~

SKU: DPTREEBARK-2-MB

Choose finish

Matte Bronze PC

Qty

1

ADD TO CART

SHARE:



N166-018 Cane Bolt in Black 1/2-in x 12-in

del #N166-018

ardware      7



\$12.28

- National Hardware's 12-in x 1/2-in cane bolt in black is used gates automatically
- Black finish for style and durability
- Mounting hardware included for easy installation

 **Hurry, Low in Stock**

- +

Add to Cart



Free Store & Curbside Pickup
3 Available today at [Bethlehem Lowe's](#)
Aisle 14 | Bay 11



Delivery ⓘ
Scheduling Available on orders \$50+
Get it by **Wed, Aug 17**