


SENTINEL™ - WALL

Project Name:	Fixture Type:
Fixture Code:	Quantities:



SENTINEL™ - WALL

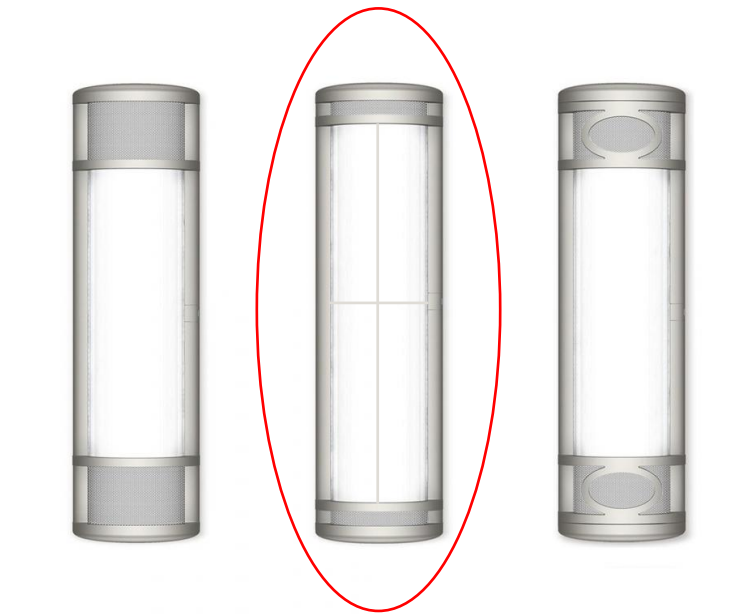

SENTINEL™ - WALL

SENTINEL stands ready and secures the way, delivering a powerful omnidirectional light reinforced with optional uplight and downlight in either narrow or wide beam angles. Available in 3 fascia's, Sentinel, Sentinel II or Sentinel III.

GENERAL SPECIFICATION

Housing

Die-cast and extruded (low copper) aluminium. Front housing hinges open for access and secures via a bolt hidden behind a spring loaded flap.

Gaskets

One piece silicone.

Drivers

HPF electronic, 120-277V, 347V (EU-240V), Dimming for Direct Light Only. Up/Down light non-dimming.

Diffuser

UV stabilised polycarbonate.

Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Approvals

IP65, Wet Location.

Finish

Exterior grade, metallic powder coated paint.

Reflector

Aluminium, white powder coated.

Mechanical

Mounts directly over a standard electrical junction box (by others - North America only).


Minimum Starting Temperature

-20°C.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

MOUNTING & OPTICS



Ext-Wall

SENTINEL™ - WALL

HOW TO ORDER

A. LUMINAIRE

ENTE1E01 Sentinel	ENTE1E02 Sentinel II	ENTE1E03 Sentinel III
--------------------------	-----------------------------	------------------------------

B. FIXTURE LENGTH

FL27 27", 1200 lms	FL51 51", 2400 lms
---------------------------	---------------------------

C. CRI

CR80 CRI 80+

D. VOLTAGE

V1 120/277V	V2 240V ¹
--------------------	-----------------------------

¹ Not available in North America.

E. DIMMING

DA10 0-10V Dimming 10%

F. CCT - FIXTURE FRONT

CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------

G. CCT - DOWNLIGHT MODULE

CTB00 Not required	CTB30 3000K	CTB35 3500K	CTB40 4000K
---------------------------	--------------------	--------------------	--------------------

H. CCT - UPLIGHT MODULE

CTC00 Not required	CTC30 3000K	CTC35 3500K	CTC40 4000K
---------------------------	--------------------	--------------------	--------------------

I. BEAM ANGLE - DOWNLIGHT MODULE

BA00 Not require	BA06 6°	BA21 21°
-------------------------	----------------	-----------------

J. BEAM ANGLE - UPLIGHT MODULE

BB00 Not required	BB06 6°	BB21 21°
--------------------------	----------------	-----------------

K. FINISH

FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA47 Bronze Metallic - Textured
---------------------------------------	--	--

L. VERTICAL BAR

VB0 Not required	VB1 Vertical bar, 27" ¹	VB2 Vertical bar, 51" ¹
-------------------------	---	---

¹ Available for Sentinel and Sentinel II fascias only.

M. EMERGENCY

E0 Not required	E2 Emergency system - Remote ¹
------------------------	--

¹ Front LED only, max distance 10ft, 120/277V).

SENTINEL™ - WALL

TECHNICAL DATA

FIXTURE LENGTH

Code	FL27	FL51
Delivered lms	1200	2400
Wattage	14	28
LPW	86	87

DOWNLIGHT MODULE BEAM

Code	BA00	BA06	BA21
Delivered Lms Down		150	210
Wattage		2	4
LPW		62	59

UPLIGHT MODULE BEAM

Code	BB00	BB06	BB21
Delivered lms Up		150	210
Wattage		2	4
LPW		62	59

LUMINAIRE



Sentinel




Sentinel II




Sentinel III

FINISH



Black Metallic - Textured



Silver Metallic - Textured



Bronze Metallic - Textured

APPROVALS



Sentinel 51"

