



View of 443 Center. Brick sidewalk that is on Wall Street side of property to remain the same. Sidewalk from existing concrete handicapped ramp north along Center Street in front of house, blue stone and slate pavers to be replaced with brushed concrete. Brick border between sidewalk and fence along front of house to remain.





Existing old deteriorating bluestone and slate sidewalk



Neighboring properties at 425 Center, 446 and 438 Center, 72 E Market, and 458 Center.



Former Unitarian Church at corner of Center and Wall

MODEL: SL75-LED | INTEGRATED LED LEDGE LIGHT

Small professional-grade integrated LED ledge light. This discreet ledge light features a wide beam angle, making it perfect for illuminating shorter walls at night while remaining hidden during the day. Designed for installation under caps using the mounting bracket or remove the bracket to surface mount directly to decks or railings. Diffusing accessories are included as optional methods to reduce glare. Wood anchors are provided; for other surfaces, please select appropriate anchors. It is recommended to leave some slack in the wire to facilitate future maintenance.

CONSTRUCTION: Solid cast brass fixture and optional glare shield.
Removeable stainless steel mounting plate included.

FINISH: Classic aged brass or modern premium black overcoat.

LENS: Optional frosted polycarbonate lens included.

LIGHT SOURCE: Integrated LED module pre-connected to the wire lead.

MOUNTING: Removeable stainless steel bracket installed.


WIRING: Pre-Installed 10' wire lead. Brown wire with aged brass finish, black wire with black overcoat.

WARRANTY: 10 year warranty on LED components and fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

Bracket Width	6.8 inches
Bracket Depth	3.5 inches
LED Housing Height	0.625 inches
LED Housing Depth	0.75 inches
Ship Weight	1.19 pounds

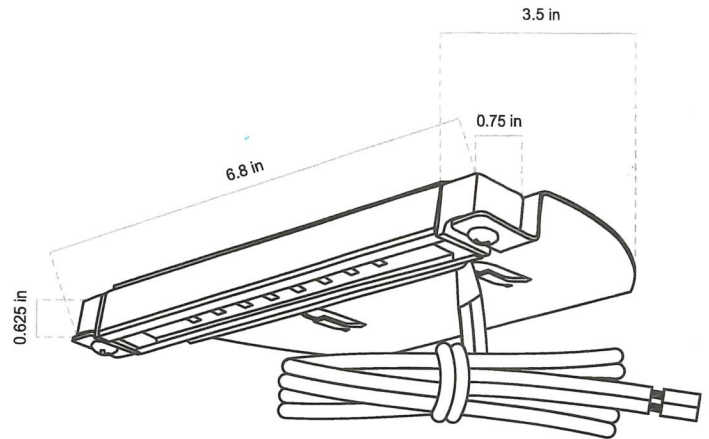

FINISH OPTIONS:


Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

INTEGRATED LED MODULE DETAILS:

WATTS: 3W
COLOR: Warm White
COLOR TEMPERATURE: 2700K
OPERATING VOLTAGE: 10 VAC - 15 VAC
CRI: Ra>80
RATED HOURS: 30,000 Hours
AMBIENT OPERATING TEMPERATURE: ~40°C ~ +85°C
DIMMING: None

HOW TO SPECIFY: Example: SL75-LED-BLK

BASE PART #	FINISH	SUFFIX	ORDERING #
SL75-LED	Aged Brass (Standard)		SL75-LED
	Premium Black Overcoat	-BLK	SL75-LED-BLK

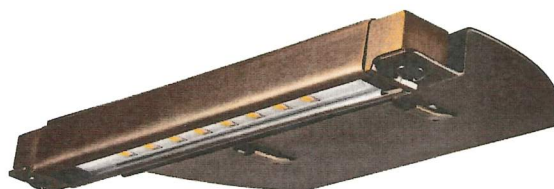

MODEL: BL900 | MR16 ACCENT / UPLIGHT

Medium sized solid brass bullet light with a long telescoping adjustable shroud for aiming and glare control. If desired, shroud can be removed. Uses MR16 lamp. Solid brass housing base is completed with a convex glass lens. Adjustable knuckle is locked with thumbscrews. Ground stake mounting is provided standard. Dual wire leads are factory-installed. Lamp purchased separately. Ideal for up lighting medium to large trees, columns, and walls while being mount in planter areas. Not intended to be used as a downlight or installed into areas with lawn-mower traffic or foot traffic.

CONSTRUCTION: Die-Casted solid brass housing, shroud and knuckle. CNC brass thumbscrews. 1/2" NPT threading from knuckle to mount.

FINISH: Classic aged brass.

SHROUD & LENS: Long telescoping adjustable shroud for aiming and glare control. Rotates 360° on the housing, pressure locked with dual o-ring seal. Convex tempered, shock-resistant glass lens.

KNUCKLE: Solid brass with brass thumbscrew for angle adjustments.

MOUNTING: Pre-installed standard 8" plastic ground stake (STAKE-P1). Slotted for easy removal without having to cut the wire lead.

WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire.

SOCKET: MR16, spring-loaded, ceramic, dual contacts, & lamp clips.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.


DIMENSIONS:

Height from top of stake to top of knuckle _____ 1.75 inches

Shroud Width _____ 2.25 inches

Shroud Height _____ 5.5 inches

Ship Weight _____ 2.74 pounds

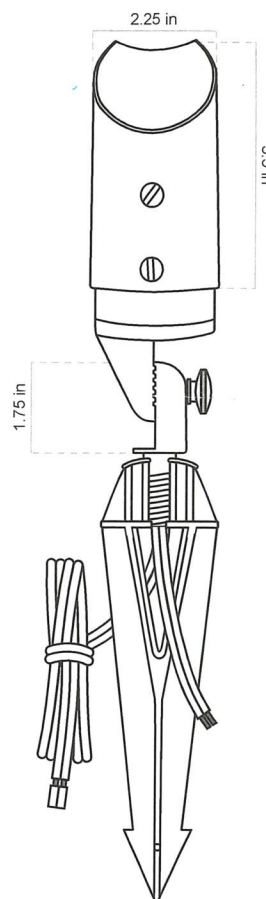

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

MR16 LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LMR16-LED-4W-NS	4	250	2900K
-LMR16-LED-4W-F	4	250	2900K
-LMR16-LED-4W-WF	4	250	2900K
-LMR16-LED-4W-250lm	4	250	2900K
-LMR16-LED-4W-2700K	4	250	2700K
-LMR16-LED-5W-NS	5	310	2900K
-LMR16-LED-5W-F*	5	310	2900K
-LMR16-LED-5W-WF	5	310	2900K
-LMR16-LED-5W-310lm	5	310	2900K
-LMR16-LED-5W-2700K	5	310	2700K
-LMR16-LED-6W-F	6	410	2900K
*-LMR16-LED-6W-2700K	6	410	2700K

= standard light source option

1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):

STAKE-P3 – Giant Slotted 14" Plastic Ground Stake
PERMAPOST – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
RMB – Brass Round Mounting Base
RMB-BLK – Black Overcoat Brass Round Mounting Base
RISER6 – 6" Fixed Riser, Aged Brass
RISER12 – 12" Fixed Riser, Aged Brass
RISER18 – 18" Fixed Riser, Aged Brass
RISER6-BLK – 6" Fixed Riser, Premium Black
RISER12-BLK – 12" Fixed Riser, Premium Black
RISER18-BLK – 18" Fixed Riser, Premium Black

MR16 LAMP ACCESSORIES:

HEXLOUVER-MR16 – Black aluminum honeycomb used to reduce glare.
MR16-FROSTED – Flat frosted glass lens used to diffuse light output.

HOW TO SPECIFY: Example: BL900-BLK-LED4W

BASE PART #	FINISH	LAMP	ORDERING NUMBER	ORDER ACCESSORIES
BL900	Aged Brass (Standard)	Add Lamp Suffix	BL900-LED4W	Mounting
	Black Overcoat (-BLK)	Add Lamp Suffix	BL900-BLK-LED4W	Risers
				Lenses



MODEL: PL100 | ADJUSTABLE G4 BIPIN PATH LIGHT

Elegant curved stem path fixture provides visual interest as well as the ultimate in aiming. The fixture hat can be pivoted to control light beam and reduce glare. Large slotted ground stake mounting is provided standard. Dual wire leads are factory-installed. Perfect for providing secure lighting along pathways or setting a mood to accentuate landscape elements along the route.

CONSTRUCTION: Solid brass stem and hat. Fully adjustable hat with locking screw CNC brass thumbscrew. 1/2" NPT threading from stem to mount.

FINISH: Classic aged brass or modern premium black overcoat.

STEM: Curved shepherd hook style brass stem.

SOCKET: G4 Bi-Pin, spring-loaded, ceramic, with dual contacts.

LENS: Frosted polycarbonate bubble lens installed.

MOUNTING: Pre-installed large 8.5" plastic ground stake (STAKE-P2). Slotted for easy removal without having to cut the wire lead.


WIRING: Pre-Installed dual 16AWG wire leads, primary 25' wire lead, and optional 18" wire lead for daisy chaining to other fixtures. Brown wire with aged brass finish, black wire with black overcoat.

WARRANTY: Lifetime warranty on fixture housing.

CERTIFICATIONS: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL & cETL Listed Mark.

DIMENSIONS:

Top of Stake to Top of Stem	19 inches
Back of Stem to Front of Hat	10 inches
Hat Height	4.2 inches
Hat Width	5.2 inches
Ship Weight	3.92 pounds

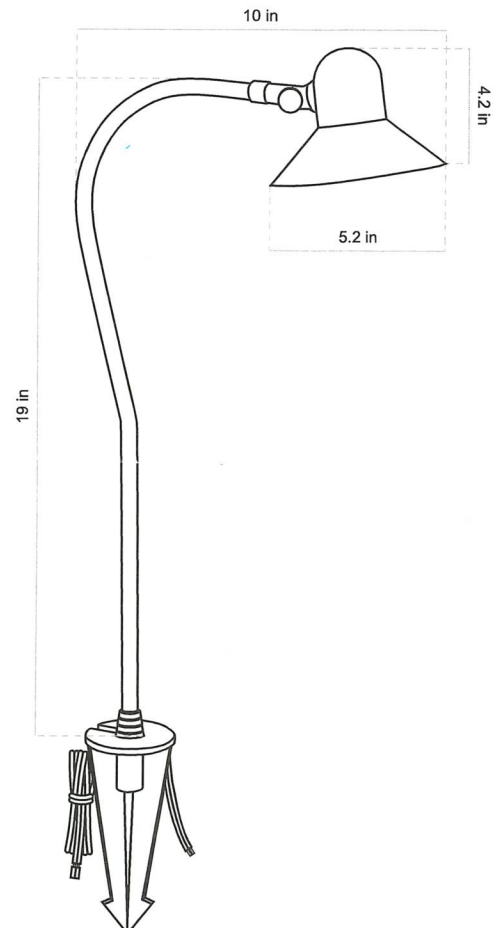

FINISH OPTIONS:

Aged Brass (Standard)
Premium Black Overcoat (Add -BLK)

G4 BIPIN LAMP OPTIONS:

ADD SUFFIX	WATTAGE	DELIVERED LUMENS	COLOR TEMP.
-LBIPIN-LED-200lm*	2.5	200	2700K
-LBIPIN-LED-250lm	3	250	2700K
-LBIPIN-LED-350lm	3.5	350	2700K

* = standard light source option

1/2" NPT MOUNTING OPTIONS (SOLD SEPARATELY):

STAKE-P3 – Giant Slotted 14" Plastic Ground Stake
PERMAPOST – Heavy Duty Stake with Brass Locking Nut & Stabilizing Fins
RMB – Brass Round Mounting Base
RMB-BLK – Black Overcoat Brass Round Mounting Base

HOW TO SPECIFY: Example: *PL100-BLK-LED*

BASE PART #	FINISH	SUFFIX	ORDERING #	LAMP	ORDERING #	ORDER ACCESSORIES
PL100	Aged Brass (Standard)		PL100	Add Lamp Suffix	PL100-LED	Mounting
	Premium Black Overcoat	-BLK	PL100-BLK		PL100-BLK-LED	



yellow dots = pathway lights

